



### EIMod Fusion IR Battle Set

- connect the IR-sender with the base plate
- place the IR-sender on a suitable position (preferably in the barrel of the gun)
- install the sensor mushroom onto the base plate. Ensure that all pins of the connector have contact to the socket.
- connect the 5-pin connector with the central unit
- now the BU functions may be activated by the DIP switches of the central unit.  
For further details please read the manual of the central unit.

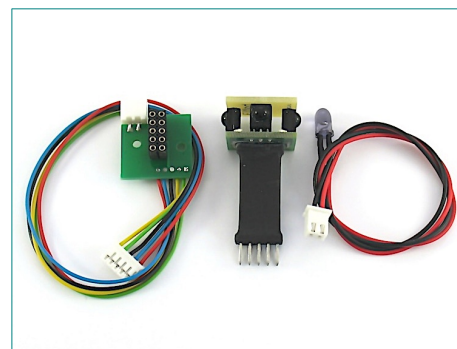


### EIMod adapter for the connection with a Tamiya® Battle System®

- connect the base plate and the IR-sender of the Tamiya® Battle Systems® with the connectors of the EIMod adapter as shown on the image
- the marks applied on the adapter must correspond to the colors of each of the cables:
  - W for white wire
  - R for red wire
- Incorrect connection may cause the destruction of the electronics!
- place the IR-sender on a suitable position (preferably in the barrel of the gun)
- connect the 5-pin connector with the central unit
- now the BU functions may be activated by the DIP switches of the central unit.  
For further details please read the manual of the central unit.

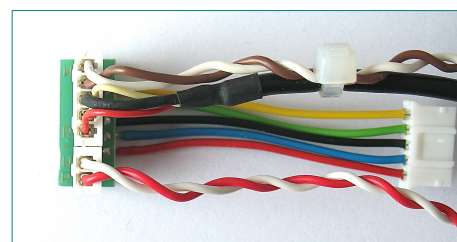


### EIMod adapter for the connection with a HengLong®/Taigen® Battle Unit

- connect the 5-pin connector of the battle unit with the adapter as shown on the image
- fix the LED ring on the sensor mushroom and connect the 2-pin cable with the adapter
- connect the 5-pin connector of the adapter with the central unit
- now the BU functions may be activated by the DIP switches of the central unit.  
For further details please read the manual of the central unit.

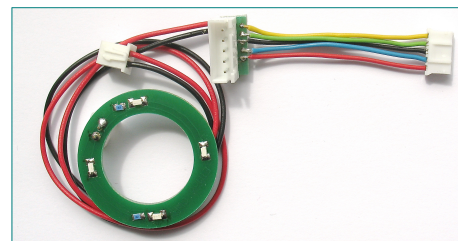

### EIMod adapter for the connection with a HengLong® TK-6.x/TK-7.x Battle Unit

- connect the 5-pin connector of the battle unit with the adapter as shown on the image
- fix the LED ring on the sensor mushroom and connect the 2-pin cable with the adapter
- connect the 3-pin sensor cable (CN16) and the 2-pin transmitter LED cable (CN15) with the corresponding connectors on the adapter.
- for TK-7.x: use the included cable to attach the sensor cable (C16) to the adapter.
- now the BU functions may be activated by the DIP switches of the central unit.  
For further details please read the manual of the central unit.

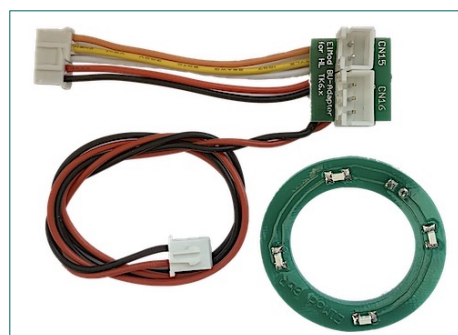

Nicht geeignet für Kinder unter 14 Jahren.

Ne convient pas pour des enfants de moins de 14 ans.

Not suitable for Children under 14 years.

Niet geschikt voor kinderen onder de 14 jaar.

EIMod Thomas Kusch

Seebuckweg 9

D-78054 Villingen-Schwenningen, Germany